



# BOBCAT

INTELLIGENT CAMERA SERIES

ICL-B4020



The **ICL-B4020** is an advanced high-speed progressive scan, fully programmable CCD camera designed for imaging applications that require high frame rates, high quality images, and powerful features and flexibility. The camera has a small size, light weight, and is built around Kodak's KAI-11002 Interline transfer CCD image sensor with a 43.3 mm image diagonal. ICL-B4020 features CameraLink output. IGV-B4020 features GigE Vision output.

The B4020 provides an image resolution of 4032 x 2688 and delivers up to 6.5 frames per second at full resolution. The camera image processing engine is based on a high-speed, high-density FPGA, featuring programmable resolution, speed, 8 independent AOIs, binning, triggering, exposure control, line and frame time, I/O mapping, external/internal sync, AGC, AEC, Auto Iris, transfer function correction, user LUT, Defective and Hot Pixel Correction (DPC, HPC), and Flat Field Correction (FFC). MTBF of 660,000 hrs. @ 40°C.

### Features

- 4032/4008 x 2688/2672
- Mono and color - 8/10/12/14-bit data
- Normal and over-clock operation (4.9/6.5 fps)
- Base CameraLink
- Two dimensional Flat Field Correction
- RS232 serial communication
- Analog and digital gain and offset control
- 1x, 2x, 3x, 4x, 8x horizontal and vertical binning
- Eight (8) independent horizontal and vertical AOIs
- Programmable horizontal and vertical resolution
- Programmable line time, frame time and speed
- Programmable external trigger:
  - 3 triggering sources
  - 5 triggering modes
- Automatic gain, exposure and iris control
- Frame accumulation

- Internal/External exposure control
- Internal/External H and V sync input/output
- Left/right digital bit shift
- Test image with image superimposition
- Built in pulse generator
- Programmable I/O mapping
  - 4 programmable inputs
  - 3 programmable outputs
- Dynamic transfer function correction
- Dynamic black level correction
- Defective and hot pixel correction
- Temperature monitor
- Field upgradeable firmware, LUT, DPC, HPC, FFC

### Applications

- Industrial
- Medical
- Microscopy
- Military
- Scientific
- Surveillance



# BOBCAT ICL-B4020 Specifications

Maximum Resolution	4032 x 2688
Sensor Type	43.3 mm diagonal CCD KAI-11002
Pixel Size	9.0 $\mu$ m
Frame Rate	4.9/6.5 fps (normal/overclock)
Max Frame Rate	39 fps
Minimum S/N ratio	60 db
Video Output	Base Camera Link, mini CL interface
Output Format	8, 10, 12 bit dual, 8, 10, 12, 14 bit single
Binning H & V	x1, x2, x3, x4, x8
Area of Interest	8 independent AOIs, 2 x 2 to 4032 x 2688
Shutter Speed	1/670000 to 1/2 sec
Long Integration	Up to 16 sec
Gamma Correction	G=1.0, G= 0.45, user upgradable LUT
Video Gain	36 dB range, 1024 steps, 0.0351 dB per step
Exposure and AGC	Manual, Auto, Programmable
Iris Control	Auto, Programmable
Hardware Trigger	LVTTTL or TTL via IN1/IN2, level, edge, pulse-width, programmable
Software Trigger	Frame-grabber via CC1/CC2, level, edge, pulse-width, programmable
Trigger Modes	Programmable, standard, double exposure, fast, frame accumulation, asynchronous
Strobe Output	Programmable position and duration
Image Overlay	Yes, Programmable
RS232 Interface	Yes
Data Corrections	DPC, HPC, LUT, FFC
Min. Illumination	1 Lux, F/1.4
Power Input Range	12 VDC, (10 V – 15 V)
Power Consumption	4.0 W
Size (W x H x L), Weight	60 x 60 x 38mm, 280g
Lens Mount	F mount
Vibration, Shock	10G (20 - 200)Hz XYZ, 70G
Environmental	Operation (-40° to +85°)C, Storage (-40° to +90°)C
Humidity	10% to 90% non-condensing
MTBF	MTBF of 660,000 hrs. @ 40°C

## Power and I/O Interface

Connector: Hirose HR 10A-10R-12PB(71)



1	12V DC Return	7	OUT1 Signal
2	+12V DC	8	IN1 Signal
3	IRIS VCC	9	IN2 Signal
4	IRIS Video	10	IN1/2 Return
5	IRIS Return	11	Reserved
6	OUT1/2 Return	12	OUT2 Signal

## Power Requirements

12V DC, (10V min, 15V max)  
330 mA steady, 1.5 A inrush  
4.0W


## Accessories

PS12V04: Power Supply (sold separately)


## Order Options

ICL-B4020M-KFO	Monochrome CameraLink Output
ICL-B4020C-KFO	Color CameraLink Output
IGV-B4020M-KFO	Monochrome GigE Output
IGV-B4020C-KFO	Color GigE Output

## Spectral Response

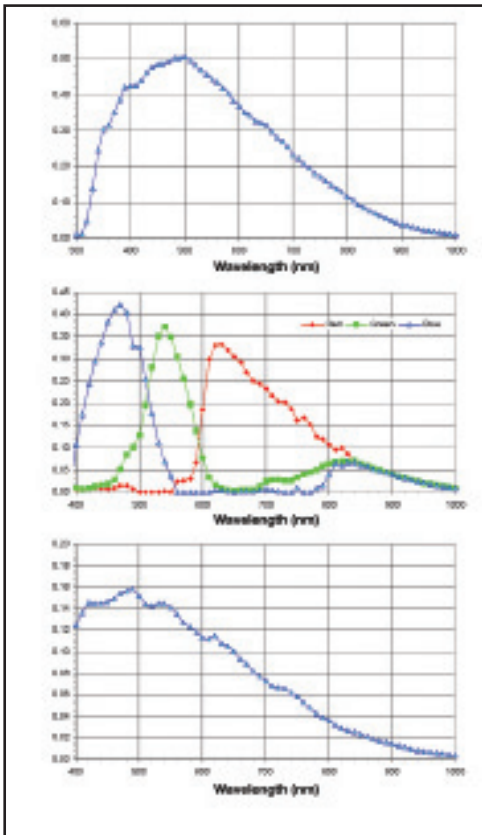


## Configuration Utility

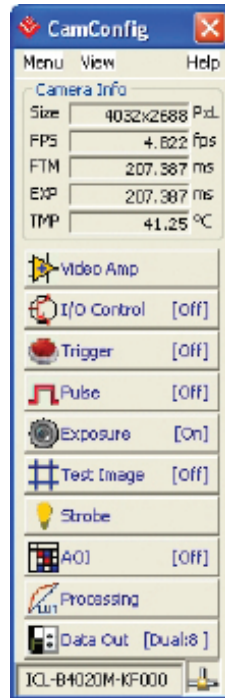

For specific details and ordering information, consult the camera user's manual or contact IMPERX at sales@imperx.com.

## Mechanical Dimensions

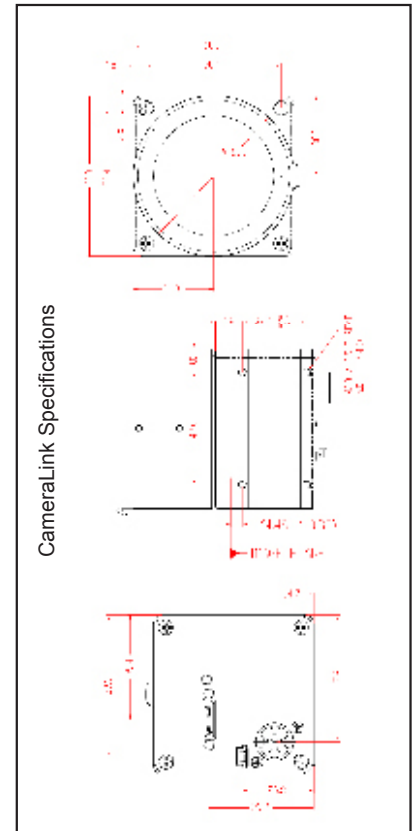

IMPERX | 6421 Congress Avenue | Boca Raton | FL 33487 | USA  
Phone: +1-561-989-0006 | 1-866-849-1662 | Fax: +1-561-989-0045  
www.imperx.com | sales@imperx.com



Copyright © 2011, Imperx, Inc. Product information subject to change without notice. Rev. 2, 09/2011