


DMM-32DX-AT



Analog I/O PC/104 Module

With Advanced Automatic-Autocalibration

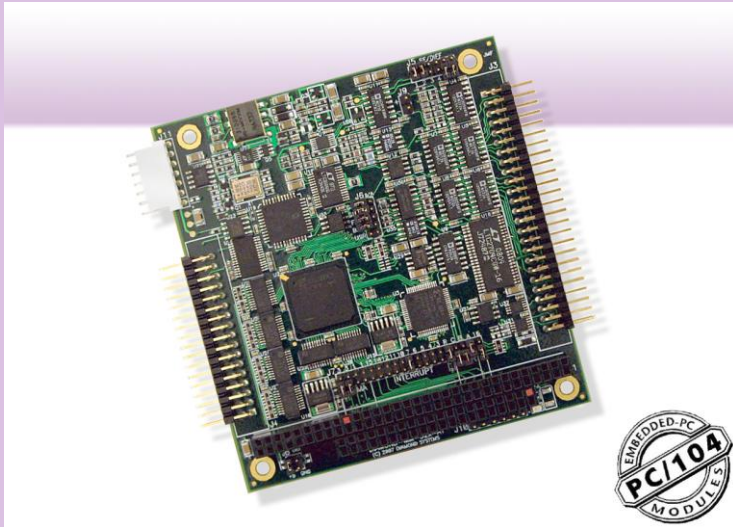

Highly Advanced Analog I/O Board

The Diamond-MM-32DX-AT includes a comprehensive suite of analog and digital features to fit a wide variety of embedded application needs.

Unparalleled Analog Accuracy

Using patented automatic-autocalibration technology, DMM-32DX-AT provides accurate analog measurements across its entire rated operating temperature range, ensuring reliable performance for critical applications.


Rugged Design

Extended temperature operation of -40°C to $+85^{\circ}\text{C}$ is tested and guaranteed. The DMM-32DX-AT uses ceramic capacitors for durability in high altitudes or other harsh environments.

Shortened Development Time

Diamond's advanced Universal Driver software is included free and provides a programming library that simplifies control of the board's features and enables you to develop your application software quickly.

- ◆ 32 analog inputs, 16-bit resolution
- ◆ Patented auto-autocalibration for high accuracy
- ◆ 250KHz maximum sampling rate
- ◆ Interrupt based A/D data transfer with FIFO support
- ◆ 4 analog outputs, 16-bit resolution
- ◆ 24 programmable direction digital I/O lines
- ◆ Counter / timers for A/D control and general use
- ◆ Low noise design
- ◆ Extremely rugged -40°C to $+85^{\circ}\text{C}$ (-40°F to $+185^{\circ}\text{F}$) operating temperature
- ◆ Free Universal Driver software

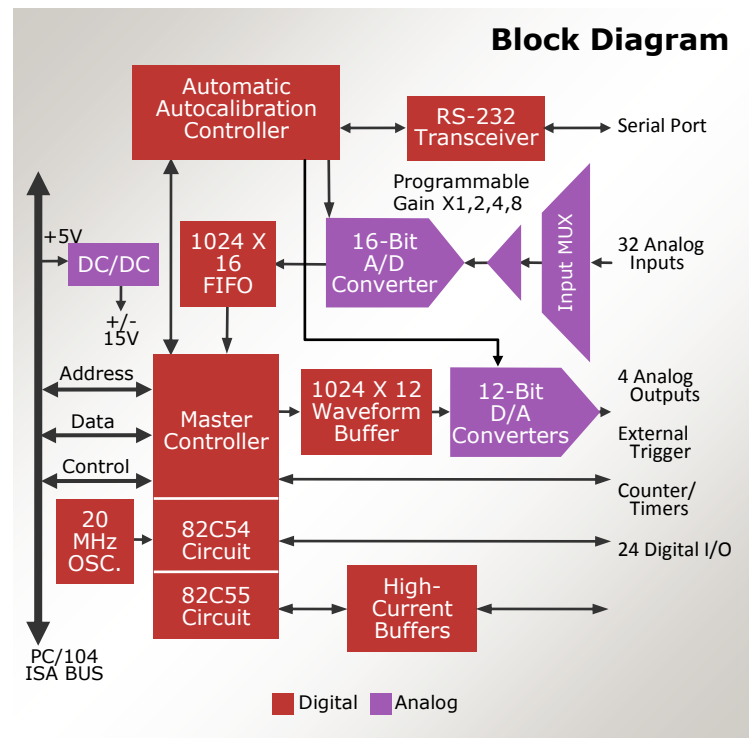

INTEGRYS
Connecting Technology & Innovation

1-888-509-8455, clientservice@integrys.com
www.integrys.com

DMM-32DX-AT: Analog I/O PC/104 Module



Specifications

ANALOG INPUTS

Number of inputs	32 single-ended or 16 differential, user selectable
A/D resolution	16 bits
Input ranges	$\pm 10V$, $\pm 5V$, $\pm 2.5V$, $\pm 1.25V$, $\pm 0.625V$, $0-10V$, $0-5V$, $0-2.5V$, $0-1.25V$, $0-0.625V$ programmable
Max sample rate	250KHz
Protection	$\pm 35V$ on any analog input without damage
Nonlinearity	$\pm 3LSB$, no missing codes
On-board FIFO	1024 samples, programmable threshold
A/D and D/A calibration	Autocalibration with software support

ANALOG OUTPUTS

Number of outputs	4, 12-bit resolution
Output ranges	$\pm 2.5V$, $\pm 5V$, $\pm 10V$, $0-5V$, $0-10V$
Output current	$\pm 5mA$ max per channel
Settling time	$6\mu S$ max to 0.01%
Relative accuracy	± 1 LSB
Nonlinearity	± 1 LSB, monotonic

DIGITAL I/O

Number of I/O	24 lines
Input voltage	Logic 0: 0.0V min, 0.8V max Logic 1: 2.0V min, 5.0V max
Input current	$\pm 1\mu A$ max
Output voltage	Logic 0: 0.0V min, 0.33V max Logic 1: 2.4V min, 5.0V max
Output current	Logic 0: 15mA max per line Logic 1: -84mA max per line

COUNTER / TIMERS

A/D Pacer clock	32-bit down counter
Clock source	10MHz on-board clock or external signal
General purpose	16-bit down counter

MISCELLANEOUS

Power supply	+5VDC $\pm 10\%$ at 410mA
Operating temp	$-40^{\circ}C$ to $+85^{\circ}C$ ($-40^{\circ}F$ to $+185^{\circ}F$)
Weight	3.4oz (96g)
MTBF	972,275 hours at $+20^{\circ}C$
RoHS	Compliant

Key Features

The DMM-32DX-AT features 32 A/D input channels with high-accuracy 16-bit resolution, 250KHz maximum sampling rate, programmable input ranges, and user-selectable single-ended / differential configuration.


The four D/A 16-bit output channels feature user-selectable output ranges as well as a programmable waveform generator feature.

DMM-32DX-AT's 24 digital I/O lines feature direction programmability in 8-bit ports as well as a buffers for enhanced output current of -15mA (Logic 1) / 64mA (Logic 0). All DIO lines feature jumper-selectable pull-up / pull-down resistors as well as ESD protection devices to help prevent field failures.

On-board programmable counter/timer circuitry includes a 32-bit counter/timer for A/D and D/A sample timing, as well as a 16-bit counter/timer for general counting, timing, and programmable interrupt functions.

Automatic-Autocalibration for Best Accuracy

Diamond's top-performing automatic-autocalibration circuitry enables you to calibrate the analog circuits under software control at any time, maintaining best accuracy under all conditions. An on-board micro-controller manages the autocalibration operation automatically for extreme accuracy and ease of operation. Temperature- and time-dependent measurement drift is eliminated, as the board can be calibrated as often as desired in just a few seconds to ensure accurate reading in all environments.

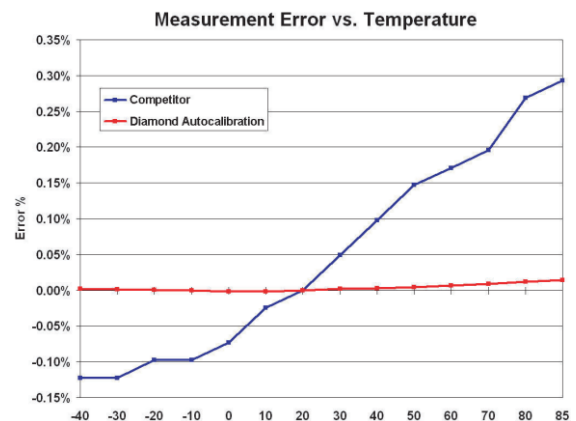

Software Support

Diamond's Universal Driver software provides a high-level programming library for all of Diamond's data acquisition products. All data acquisition features are supported with easy-to-use function calls, resulting in a reduced learning curve and shortened application development time. Universal Driver works with Windows XP, CE, Linux, QNX and DOS. Application examples are included for each function and OS to provide a quick starting point for development.

Ordering Information

DMM-32DX-AT Analog I/O PC/104 Module with auto-autocalibration



INTEGRYS
Connecting Technology & Innovation

1-888-509-8455, clientservice@integrys.com
www.integrys.com