

AL116

Compact High Brightness Bar Light



- 4i** High intensity light in a small package - only 32.2 mm (1.27") wide
- 4i** Convenient M4 nut channel for mounting

Ordering Information

Standard Product:
Shipped Next Day

AL116-WHIC


Configured with inline
Current Source

Standard Product Variation:
Shipped Within Two Weeks


AL116	-	XXX	XX	X	X	XXX
		(blue) 470 (red) 625 (white) WHI	IC IS C2 C3 C5 24	W	D (Diffuser) P* (Polarizer)	M12* (male)

IC = ICS (requires 24v power supply)
 IS = ISU (requires 24v power supply)
 C2 = Ai Connector
 C5 = Pulsar 320 Connector
 ° Not available in combination with the Wash Down Option
 * Available with IC, IS, and 24v options only

Dimensional Information

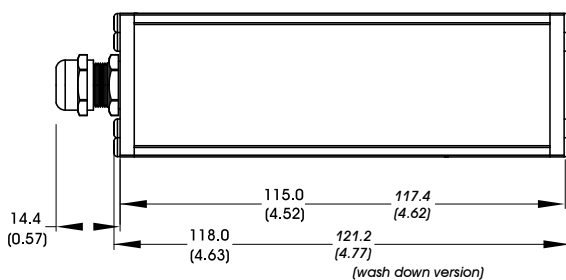

Cable Length: 1.5 Meter (59")

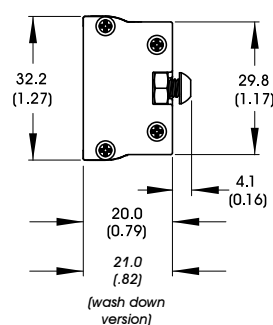

DIMENSIONS ARE IN MILLIMETERS (INCHES)

[Click for Installation Models & Drawings](#)

Current Requirements

	blue	red	white	
24v	400	400	400	mA

Standard Product Information

Weight:	70.9 g (2.5 oz)
Finish:	Black Anodized
Operating Temperature:	0-60° C
Meets Specifications:	CE, RoHS