

# AL126

## Compact High Brightness Bar Light



- 4i**) High intensity light in a small package - only 20mm (.79") wide.
- 4i**) Convenient M4 nut channel for mounting

### Ordering Information

Standard Product:  
Shipped Next Day

**AL126-WHIC**


Configured with inline  
Current Source

Standard Product Variation:  
Shipped Within Two Weeks

AL126	-	XXX	XX	X	X	XXX
		(blue) 470 (red) 625 (white) WHI	IC IS C2 C3 C5 24	W	D (Diffuser) P° (Polarizer)	M12* (male)

IC = ICS (requires 24v power supply)  
 IS = ISU (requires 24v power supply)  
 C2 = Ai Connector  
 C5 = Pulsar 320 Connector  
 ° Not available in combination with the Wash Down Option  
 \* Available with IC, IS, and 24v options only

### Dimensional Information

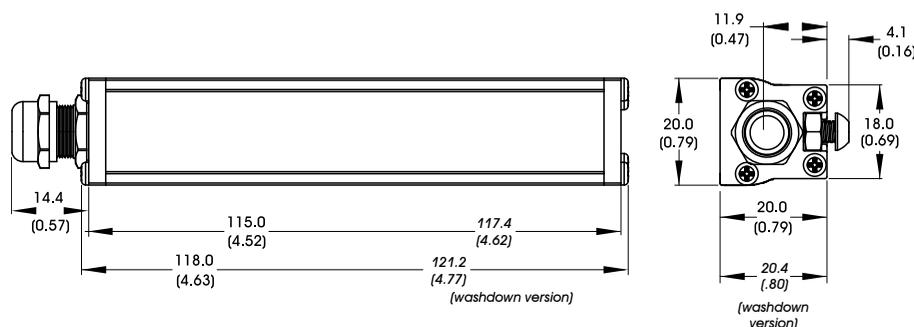

[Click for Installation Models & Drawings](#)

Cable Length: 1.5M (59")

DIMENSIONS ARE IN MILLIMETERS (INCHES)

### Current Requirements

	blue	red	white	
24v	200	200	200	mA

### Standard Product Information

Weight:	56.7 g (2.0 oz)
Finish:	Black Anodized
Operating Temperature:	0-60° C
Meets Specifications:	CE, RoHS