

BL0808

8" x 8" Surface Mount LED Back Light



- 4i)** Extremely consistent light over the entire active area of illumination.
- 4i)** Integral M6 nut channel for easy mounting.

Ordering Information

Standard Product:
Shipped Next Day

BL0808-66024


Configured for use with user supplied 24vDC Power Supply

Standard Product Variation:
Red & White: Shipped Within Two Weeks
Blue & Infra-red: 4 Weeks **Green:** 6 Weeks

		Spectral wavelength	Optional power Compatibility	Optional Light Conditioning	Alternative Connector
BL 08 08	-	XXX	XX	X	XXX
		(blue) 470 [†]	IC	P	M12* (male)
		(green) 520 [†]	C3		
		(red) 660 [⊗]	C5		
		(infra-red) 880 [⊗]	12		
		(white) WHI [†]	24		

IC = iCS (requires 24v power supply)
C2 = Ai Connector
C3 = Pulsar 710 Connector
C5 = Pulsar 320 Connector
* Available with IC, IS, and 24v options only
[†] Not available in 12v
⊗ ICS not available

Dimensional Information

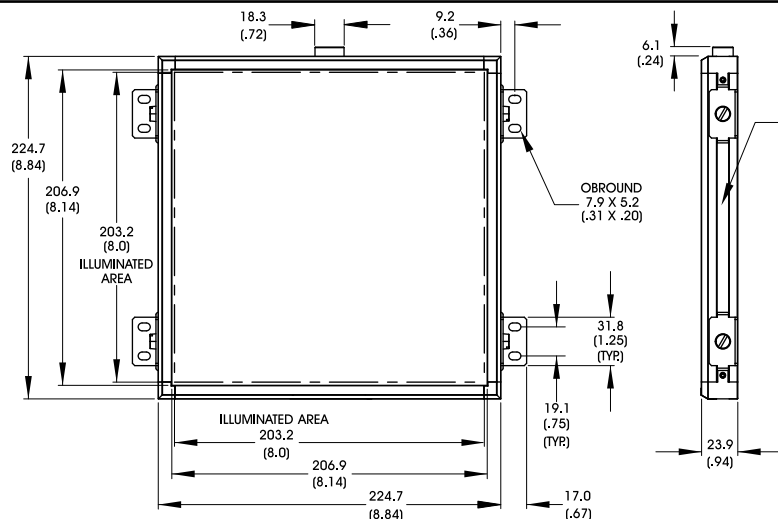

[Click for Installation Models & Drawings](#)

Cable Length: 1.5 Meter (59")

DIMENSIONS ARE IN MILLIMETERS (INCHES)

Standard Variation Current Specifications

	blue	green	red	infra-red	white	
@12	N/A	N/A	3.84	3.84	N/A	A
@24	1.28	1.28	1.92	1.92	1.28	A

Standard Product Information

Product Lifetime:	50,000 hours
Operating Temperature:	0-60° C