

RL2316

Bright Field Ring Light



- Aii** Light weight, super efficient space saving design
- Aii** Axial light source designed for small, non-specular objects or inspections with limited space

Ordering Information

Standard Product:
Shipped Next Day


RL2316-660100L

Configured for use with Ai Power Supply

Standard Product Variation:
Shipped Within Two Weeks


RL2316	-	Spectral wavelength	Stand off	Field of view	Optional power Compatibility	Optional Light Conditioning	Alternative Connector
		XXX	XXX	XXX	XX	X	XXX
		(UV) 395 [◇] (blue) 470 [†] (green) 520 [†] (yellow) 590 (orange) 625 (red) 660 (infra-red) 880 (white) WHI [†]	See chart to Compute standoff.	XXL XL L M S XS	IS C2 C3 12 24	D (Diffuser) P (Polarizer)	M12* (male)

IS = ISU (requires 24v power supply)
C2 = Ai Connector
C3 = Pulsar 710 Connector
★ Available with 24v option only
† Not available in 12v

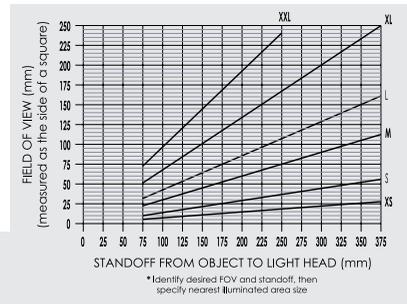

◇ UV LEDs have a considerably shorter half-life than other LEDs (<1000hrs). For this reason Ai recommends these LEDs be used in strobe mode only. For applications requiring continuous 24v power, contact Ai for assistance.

Dimensional Information

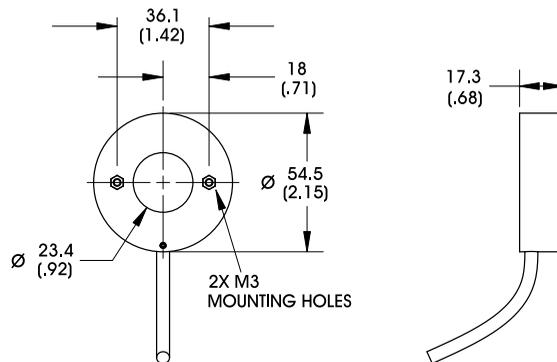

[Click for Installation Models & Drawings](#)

Cable Length: 1.5 Meters (59")

DIMENSIONS ARE IN MILLIMETERS (INCHES)

Standard Variation Current Specifications

	blue	green	yellow	orange	red	infra-red	white	RGB	
@12	N/A	N/A	80	80	120	130	N/A	N/A	mA
@24	80	80	40	40	60	70	80	N/A	mA

Standard Product Information

Product Lifetime:	50,000 hours
Operating Temperature:	0-60° C