

Vega SMB SBC Appliance



IP communications across multiple, sometimes untrusted, networks needs to be normalized, managed and secured. There is a need to guarantee interoperability of multiple devices, carriers and protocols in a transparent way to the user of the network. Session border controllers take care of the conversion between protocols, transcoding, threat prevention, resource limiting, and accounting at the edge of VoIP networks of enterprises and carriers alike.



You wouldn't put your data network on the internet without a firewall—why would you expose your voice network without a Session Border Controller?

Small to Medium Business SBCs (SMB SBC) sit at the edge of your company's network and do the heavy lifting for VoIP phone calls that your firewall isn't designed to do. Hide important voice network information, protect your company network from malicious attacks—that can cause your telephone bill to skyrocket or become susceptible for hackers to breach your system and take down the network.

Sangoma session border controllers offer affordable protection for small business that most integrators can configure and provision easily.

Tailored for Your Business Needs

All Sangoma SBCs feature field upgradable, session-based licensing as well as hardware-based transcoding and media handling (Excludes Vega SMB). Support for a broad range of SIP trunking topologies and integration with Skype for Business and Microsoft Lync environments, the Vega series includes comprehensive security configuration and a full suite of GUI-based tools and APIs for deployment, management, reporting and troubleshooting.



Quick Facts

- » Supports 5 - 20 Simultaneous Calls
- » Migrate to SIP Trunking or Hosted PBX Securely
- » Empower Remote Workers
- » Interoperates with All Major IP PBXs & UC Systems
- » DoS/DDoS Attack Protection
- » Network Interconnect Point for SIP Trunking
- » Topology Hiding for Fraud Protection
- » Optional Annual Support & Software Maintenance Plans

ADVANCED CAPABILITIES

High Availability

Ensure business continuity with our new High Availability (HA) feature, allowing mirroring of your main SBC with a standby SBC ready to automatically take over calls in case of failure. This feature is included free of charge!

Protection from Enterprise Security Threats Denial of Services

- » Call/registration overload
- » Malformed messages (fuzzing)

Configuration Errors

- » Mis-configured devices
- » Operator and application errors

Theft of Service / Fraud

- » Unauthorized users
- » Unauthorized media types

BYOD


- » Smartphones running unauthorized apps
- » Viruses and malware attacking your VoIP network

USE CASES

Service Provider Applications

- » Migration of legacy TDM to SIP trunking for cost savings
- » Provide secure access to hosted PBX
- » Provide secure connectivity for remote workers
- » "Smart Edge" device for service provider or carrier

ON-PREMISE PBX SETUP

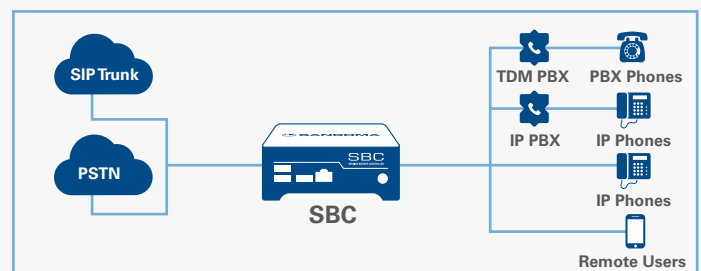

TECHNICAL SPECIFICATIONS

Features

Capacities:

- » Max. 20 calls/sessions
- » Full security (SRTP/TLS) capability
- » Unlimited SIP trunks

Media Capabilities:

- » Voice, Video, FAX, IM and Presence support
- » G.711 ulaw/alaw

Networking:

- » 4x 10/100/1000 BaseT Ethernet ports
- » IPV4, IPV6
- » VLAN support
- » 1x serial console port
- » 1x VGA port
- » 3x USB ports

Licensing:

- » Only max. number of calls are licensed
- » Field upgradeable in 5/10 call increments

Security:

- » DDoS / DoS attack protection
- » Call security with TLS/SRTP
- » Media security with SRTP
- » IPSec encryption
- » IP firewall with port forwarding
- » Two-stage authentication

High Availability / Redundancy:

- » 1:1 active/standby two-box redundancy to guarantee business continuity

Call Control:

- » Advanced XML routing engine
- » Dynamic load balancing and call routing
- » Multiple call access control options
- » Least cost routing
- » Rate limiting: Call and registration
- » Endpoint authentication
- » Media bandwidth policy
- » Intelligent media anchoring/release

VoIP:

- » SIP 2.0 compliant
- » SIP trunking and remote working
- » SIP intrusion prevention
- » SIP registration scan attack detection
- » SIP request rate limiting
- » SIP registration pass-thru
- » SIP header normalization
- » SIP malformed packet protection
- » Advanced NAT traversal capabilities
- » Topology hiding
- » ENUM routing

Session and Monitoring:

- » Multiple session routing options
- » RTCP statistics reports
- » QoS (ToS or DSCP)
- » RADIUS CDR and authentication
- » QoS monitoring and reporting

Debugging:

- » Dedicated browser interface for capturing full RTP media and signaling information
- » Onboard browser-based PCAP tracing, signalling and media – wireshark compatible
- » Large onboard storage capacity for long term tracing

Management:

- » Easy to use web interface
- » HTTP XML-based CDR
- » Real-time monitoring and debugging
- » TR-069 for remote provisioning
- » REST based interface to remotely configure SBCs

Hardware

Specifications:

- » 4x GB Ethernet ports
- » 3x USB ports
- » 1x serial console (RJ45)
- » 1x VGA port
- » Unit dimensions
 - > 127mm (W) x 127mm (D) x 50mm (H)
- » Unit weight
 - > .68kgs (1.5lbs)
- » External universal AC/DC power brick
- » Wall mount bracket included

CONTACT SALES
FOR RELEASE DATES