



Condor GR2-RTX5000



Toll Free: 888-509-8455, Email: clientservice@integrys.com
www.integrys.com



3U VPX Graphics & GPGPU Card with Three DisplayPort / DVI Outputs

The Condor GR2-RTX5000 is a rugged 3U VPX form factor card based on NVIDIA® Turing™ architecture and the NVIDIA RTX™ platform. Based on MXM technology, this graphics and GPGPU card incorporates the most powerful GPU that is currently available in the rugged market. With exceptional performance in GPGPU computing, AI inferencing, deep learning, sensor processing, and data analytics, the card is ideal for ISR (Intelligence, Surveillance & Reconnaissance), EW (Electronic Warfare), DSP (Digital Signal Processing), DVE (Degraded Visual Environments), and Data Science applications. It is available as conduction cooled and air cooled.

The Condor GR2-RTX5000 meets strict data integrity requirements for mission-critical applications with uncompromised computing accuracy and reliability. The 3072 CUDA® parallel processing cores in the NVIDIA Turing™ architecture offer a multitude of capabilities such as mesh shading, variable rate shading, texture space shading, multi-view rendering, and ultra-high performance GPGPU computing. The GPUDirect® RDMA implementation offers fast data transfer/communication from connected hardware, such as FPGAs, and switches directly into GPU memory, avoiding unnecessary memory copies and CPU overhead resulting in minimal latency. With 384 Tensor cores and 48 RT cores, the Condor GR2-RTX5000 delivers high AI inferencing performance. Multiple precision modes such as FP64, FP32, FP16, INT8, INT4, and INT1, enables up to 32X throughput compared to previous generations and even offers features like AI de-noising.

The Condor GR2-RTX5000 delivers real-time performance for encoding applications with dedicated H.265 and H.264 encode and decode engines. With multiple output configurations, this rugged 3U VPX card offers I/O customizations with options that include DisplayPort++, single-link DVI-D, and VGA using an EIZO Rugged Solutions' Adapt Video Converter. It is currently available as air cooled or conduction cooled with thermally efficient heatsink technology.

Key features of this product:

- NVIDIA® Quadro RTX™ 5000 GPU (TU104)
- NVIDIA Turing™ Architecture
- Two Output Configurations: 3 Outputs total
 - (2) Rear DisplayPort++ Video Outputs and
 - (1) Rear single-link DVI-D Video OutputsOR
 - (3) Single-Link DVI-D Video Outputs
- MXM based design; MIL-STD-810 Compliant.
- 16 GB GDDR6 Graphics Memory
- 256-bit Memory Interface
- 448 GB/s Memory Bandwidth
- 3072 CUDA Cores
- 384 Tensor Cores. 48 RT Cores
- Up to 9.49 TFLOPs FP32 Compute Performance
- 16, 8 or 4 Lane PCI Express 3.0
- CUDA® 10, CUDA-X, OpenCL 1.2, Vulkan 1.1
- H.265 & H.264 Hardware Encoder/Decoder
- NVIDIA GPUDirect™ RDMA, NVENC. NVDEC
- Conduction Cooled & Air Cooled


Fully Ruggedized



Condor GR2-RTX5000 Specifications

Graphics Processor	NVIDIA Quadro RTX 5000 GPU (TU104 Turing Architecture) Supporting DirectX 12, OpenGL 4.5, and Vulkan 1.2
Interface	3U VPX Form Factor 1" Pitch (Conduction Cooled) 1" Pitch (Air Cooled)
Graphics Memory	16 GB GDDR6 256-bit Memory Interface 448 GB/s Memory Bandwidth
Video Outputs	Two DisplayPort++ & one single-link DVI-D OR Three Single-Link DVI-D (DisplayPort Can Be Converted to DVI or VGA With Adapters)
GPGPU Capabilities	3072 CUDA Cores. 384 Tensor Cores. 48 RT Cores. Up to 9.49 TFLOPS FP32 Single Floating Point Performance Supports CUDA 10 (Compute Capability 7.5) and CUDA-X OpenCL 1.2 and Shader Model 5.1 H.265 (HEVC) / H.264 (MPEG4/AVC) Hardware Encode & Decode NVIDIA GPUDirect® RDMA, NVENC, NVDEC
Power Consumption	110 W
Operating Temperature (MIL-STD-810)	-40°C to 70°C (Rugged Air Cooled) -40°C to 85°C (Rugged Conduction Cooled) Please refer to the Hardware User Guide for details on temperature/performance characterization.
Vibration (MIL-STD-810)	0.1 g ² /Hz
Shock (MIL-STD-810)	40 g
Humidity (MIL-STD-810)	95% Without Condensation

Condor GR2-RTX5000 Block Diagram

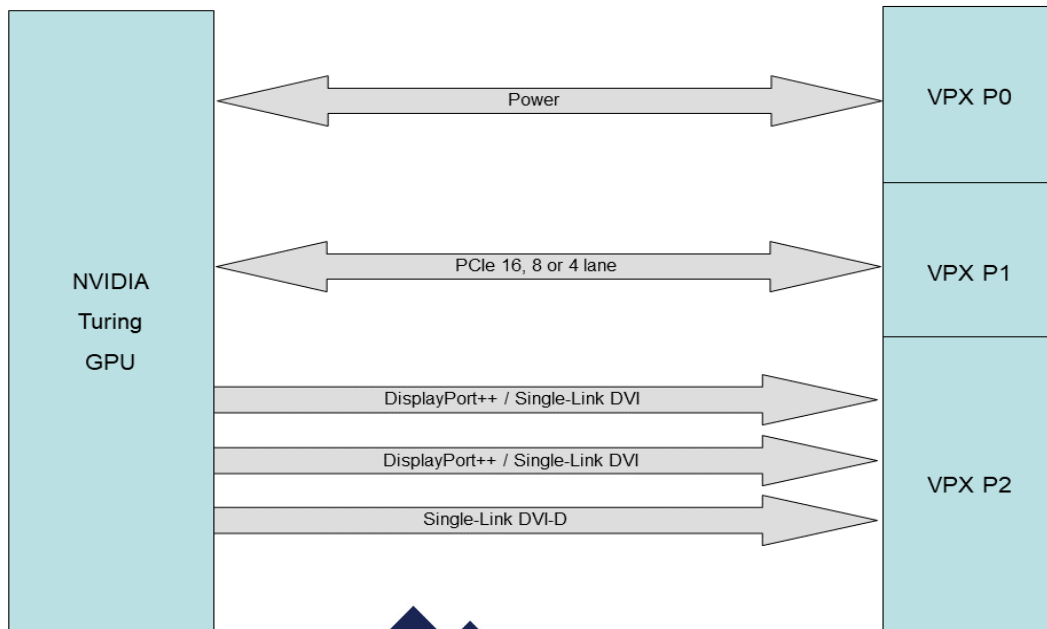

Toll Free: 888-509-8455, Email: clientservice@integrys.com
www.integrys.com



EIZO Rugged Solutions

EIZO, the EIZO logo, and Condor are trademarks or registered trademarks of EIZO Corporation. All other company names, product names, and logos are trademarks or registered trademarks of their respective companies. Copyright ©2020 EIZO Rugged Solutions Inc. All rights reserved. Information in this document is subject to change without notice. EIZO Rugged Solutions Inc. assumes no responsibility for errors or omissions that may appear in this document.